


LYKZJ-180型全自动薄膜捆扎机

Lykzj-180 automatic film binding machine

性能描述

本机根据包装物的尺寸及前端生产线装盒机的速度以独特的创意对该包装物进行整理、集合、绕膜、焊合。本包装机系列产品,使用聚乙烯 (Pe) 弹力膜为包装材料。应用于医药制品行业的捆扎包装。与装盒机连线效果更加。

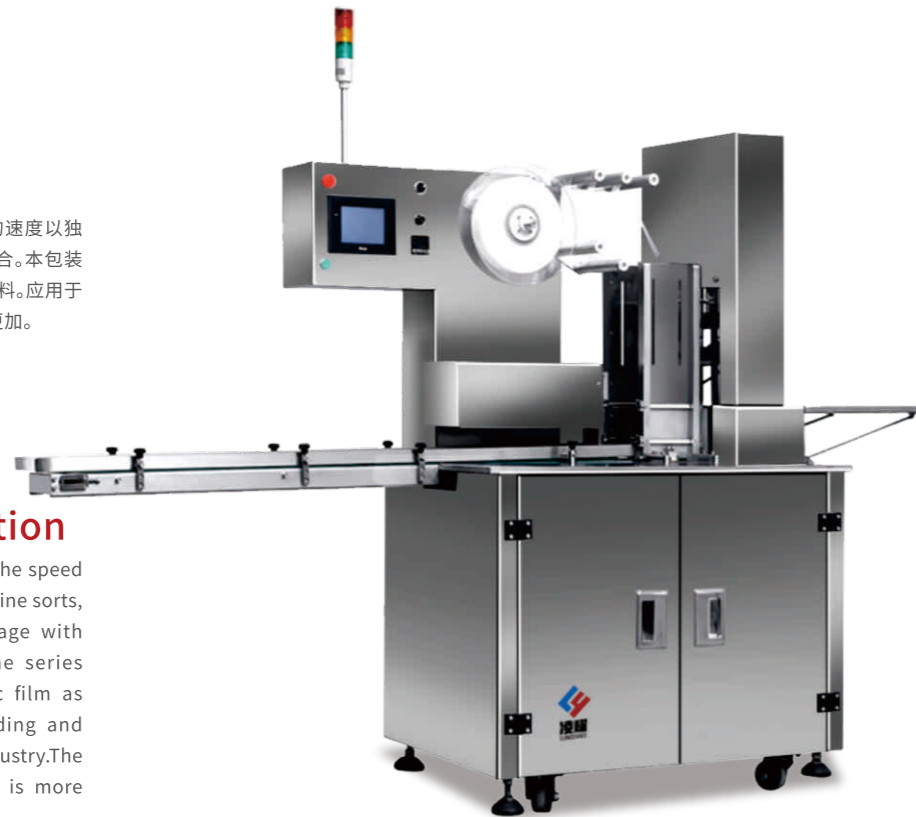

Performance description


According to the size of the package and the speed of the front-end production line, this machine sorts, assembles, wraps and welds the package with unique creativity. This packing machine series products use polyethylene (PE) elastic film as packing material. It is used in the binding and packaging of pharmaceutical products industry. The connection with the cartoning machine is more effective.

设备参数technical parameters

名称 Name	值或说明	description
标准机型最大包装物尺寸 Maximum package size	125 x 180 x 200 (L*W*H)mm	125 x 180 x 200 (L*W*H)mm
PE膜尺寸 PE film size	宽度30-80mm、厚度30-80um	Width 30-80mm, thickness 30-80um
捆包速度 Banding rate	8-15包/分钟	8-15Pack / min
额定功率 Rated power	AC 220V 50HZ 1kw	AC 220V 50HZ 1kw
压缩空气压力耗气量 Compressed air pressure air consumption	0.4-0.7、5~10/mi	0.4-0.7、5~10/mi
总重量 Total weight	150kg	150kg
噪声 Noise	≤75dB	Less than 75dB
外形尺寸 Out size	1600×700×1750不含连接部分	1600×700×1750 without connection

LYKZJ-500型全自动高速薄膜捆扎机

Lykzj-500 automatic high speed film binding machine

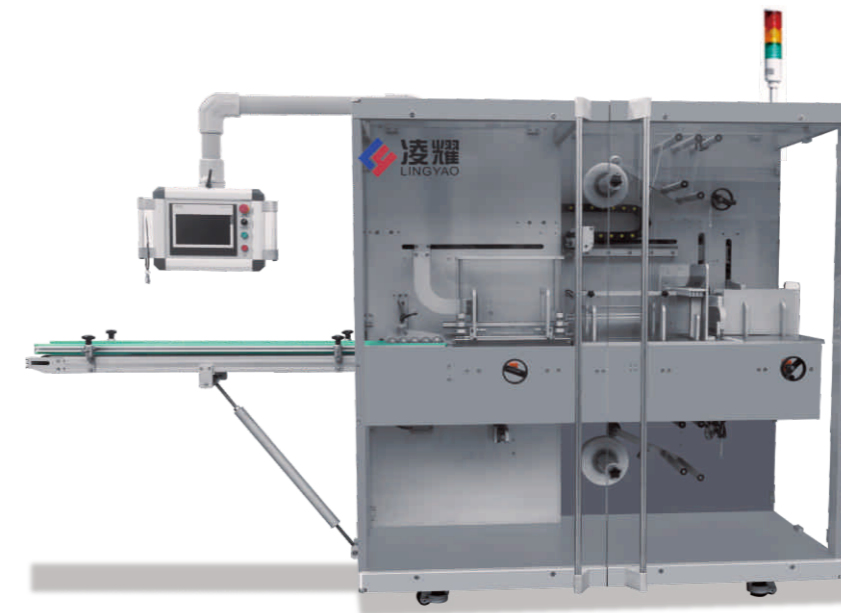

性能特点

性能特点: LYKZJ-500型全自动高速薄膜捆扎机是我公司在吸取国外结合国内最先进技术而研发而来的新产品,可与前端装盒机后端自动装箱机相连接组成后道包装联动生产线,本机机身全部采用全铝高端设计美观大气,采用触摸屏、PLC自动控制、变频调速、中(英)文和数字显示、电气元件均选自国内外知名品牌,系统运行稳定,操作更简单方便,并可显示机器运行状态、故障诊断提示、故障自动停机,使整个生产过程达到自动化控制,符合CGMP的规范标准。

Performance features

lykzj-500 full-automatic high-speed film binding machine is a new product developed by our company in combination with the most advanced technology at home and abroad. It can be connected with the automatic packing machine at the back end of the front-end cartoning machine to form a rear packaging linkage production line. The machine body is all made of aluminum high-quality design, beautiful and atmospheric, with touch screen, PLC automatic control, frequency conversion speed regulation, Chinese (English) and digital display, electrical components are selected from well-known brands at home and abroad. The system is stable in operation, more simple and convenient in operation, and can display the operation status of the machine, fault diagnosis prompt, and automatic shutdown, so that the whole production process can achieve automatic control and meet the standard of cGMP.

设备参数technical parameters

名称 Name	数值或说明	description
标准机型包装物尺寸 Package size	最大250 x 250 x 300 (L*W*H)mm 最小50 x 60 x 90 (L*W*H)mm	Maximum 250 x 250 x 300 (L * w * h) mm Minimum 50 x 60 x 90 (L * w * h) mm
PE膜尺寸 PE film size	宽度30-80mm、厚度30-80um	Width 30-80mm, thickness 30-80um
捆包速度 Banding rate	25-50包/分钟	25-50Pack / min
额定功率 Rated power	AC 220V 50HZ 3kw	AC 220V 50HZ 3kw
压缩空气压力耗气量 Compressed air pressure air consumption	0.4-0.7、5~10/mi	0.4-0.7、5~10/mi
总重量 Total weight	150kg	150kg
噪声 Noise	≤75dB	Less than 75dB
外形尺寸 Out size	2000×980×1800不含连接部分	2000×980×1800 without connection